

***Decking  
for the Future***

**THE  
X  
TREEK**



**DECKING  
SYSTEMS**

Flexiteek is supplied ready to lay. All our decks are custom made from templates for each project. We supply them in one piece ready to glue down, complete with margins, hatches and deck details.



All the good looks and appeal of a freshly sanded teak deck. Although it looks like teak, it is highly resistant to your common spills such as oil, fuel, red wine, fish blood etc. decks are available with black, white or grey caulking.

Colour is as natural as wood with a grain structure throughout its thickness. It is sanded in the same way as wood resulting in a natural wood finish.



Flexiteek does not require sealing or difficult ongoing maintenance. A gentle sand once in a while will refresh your deck and remove any stubborn stains.

Excellent non-slip surface. Wet or dry, Flexiteek provides amazing grip in the toughest conditions.


UV Resistant. Flexiteek has been tested to ASTM G 154-00 and is successfully used in the harsh environments of the Australian and Caribbean tropics.



Easy to clean and maintain. Soap and water makes removal of most spills easy, you can also use a power wash without damaging your deck. Flexiteek may go darker over time and a gentle sand will return it to the original finish.

### Flexiteek has significant advantages over a wooden deck:

- Easy to maintain
- Does not go grey
- Stain resistant
- UV resistant
- Cost effective
- Fast installation
- Impact resistant

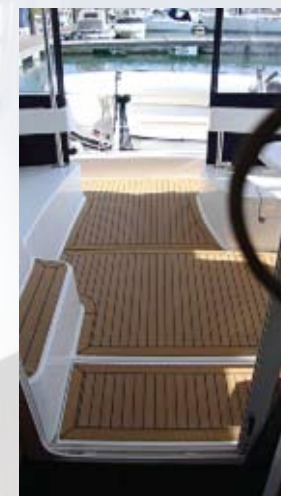

Flexiteek trims can be combined with other Flexiteek decking products to provide a perfect finish for that uniform Flexiteek look for internal cabin design and external deck installations. The various trim profiles are made of PVC to look and feel like real wood. They are durable, resistant to water and will not crack or fade like real teak.



**Flexiteek Nosing Section (N/1119)**

The 40mm x 20mm nosing section can be used as an edging product for steps or furniture. It comes in a 10m coil - unsanded (*weight c.1kg per linear metre*).



**Flexiteek Toe Rail (T/1186)**

The 34mm x 40mm toe rail section is made in standard 2.4m lengths - unsanded (*weight c. 1.2kg per metre*). A 10mm diameter plug section (T/1207) is available to fill in the screw holes after installation.



**Flexiteek Rubbing Rail (R/1148)**

This 65mm x 20mm product is available in a 10m coil - sanded on one side. (*1.75kg per linear metre*). As well as a rubbing rail, this versatile section can be used for other applications.



**Flexiteek T-Section (T/873)**

The T-sections are 19mm and 25mm wide and can be used for trimming edges to give a uniform Flexiteek finish. (T/873/19 & T/873/25) (*10m coil - sanded on one side - weight c. 0.13kg & 0.70kg per metre*).

Flexiteek is a completely welded system that does not use any adhesives in the manufacturing process.

It is available in a variety of plank widths and is for professional manufacture only.

All manufacturers are fully trained by Flexiteek and are highly skilled in the design and manufacture of decks. All of our decks are bespoke, hand-made and designed to your specifications.



**ISITEEK™**

Do-it-yourself installations can be performed with our new Isiteek material.

With a thickness of 4 mm and a broader glue contact area, it is designed for the handyman among boat owners who wants to install smaller deck areas.

The Isiteek material is available in 45 mm width, 60 mm margin and 125 mm king plank.

It is available with white or black caulk lines.

Step by step instructions will be given and can be found on the webste.





# FLEXITEEK



For further information on how you can get a Flexiteek deck for your boat, please contact the UK, Ireland and France distributor:



Unit D, Deacons Boatyard, Bridge Road  
Bursledon, Hants, England SO31 8AW

t +44 (0) 2380 405550

f 0870 7627024

sales@deckingsystems.co.uk [www.deckingsystems.co.uk](http://www.deckingsystems.co.uk)